

Revisions

Issue	Date	Note
1	11/04/2022	See note GTXPDC/474

DATASHEET



1. Mechanical


Fixing Method Clamp
 Durability 500 mating cycles
 Cable Retention Equal to breaking strain of cable

2. Environmental

RoHS Compliant Yes
 Temperature Range -65 to +165 degrees C

3. Electrical

Dielectric Withstanding 1500 Volts RMS Maximum
 Impedance 50 ohms
 Interface Frequency 4 GHz
 Working Voltage 500 Volts RMS Maximum

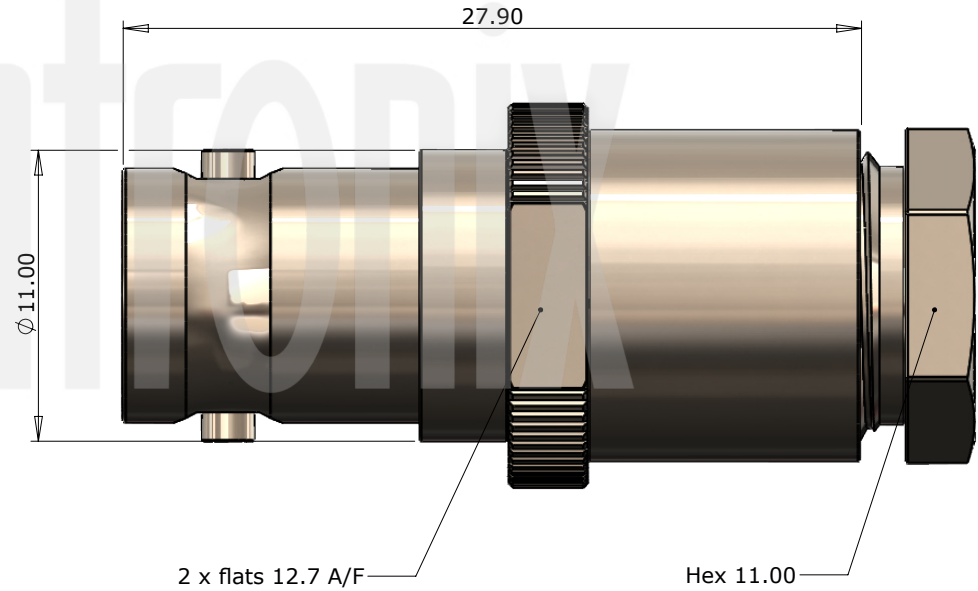

8	Insulator	PTFE	White
7	Back Nut	Brass	Nickel
6	Washer	Brass	Nickel
5	Gasket	Rubber	Red
4	Top Hat	Brass	Nickel
3	Dielectric	PTFE	White
2	Contact	Brass	Gold
1	Body	Brass	Nickel
	Description	Material	Finish

Unless otherwise specified tolerances
 0.5-5 = ±0.2
 >5-30 = ±0.4
 >30-120 = ±0.6
 >120-315 = ±1.0
 >315-1000 = ±1.6
 Angles = ±5°
 Units = mm

This document is the confidential property of Gigatronix Limited and may not be copied, reproduced or transmitted to any third party without written authorisation.




Author	PJP
Drawn by	PJP
Drawing date	11/04/2022
Checked by	DB
Checked date	13/04/2022
Scale	Not to scale

Part Number BN10-0223-L06-2
Title: BNC Clamp Jack, Nickel Plated, Compression Fixing, RG58, LBC195, RG223, RG400

Revisions		
Issue	Date	Note
1	11/04/2022	See note GTXPDC/474

ASSEMBLY INSTRUCTIONS

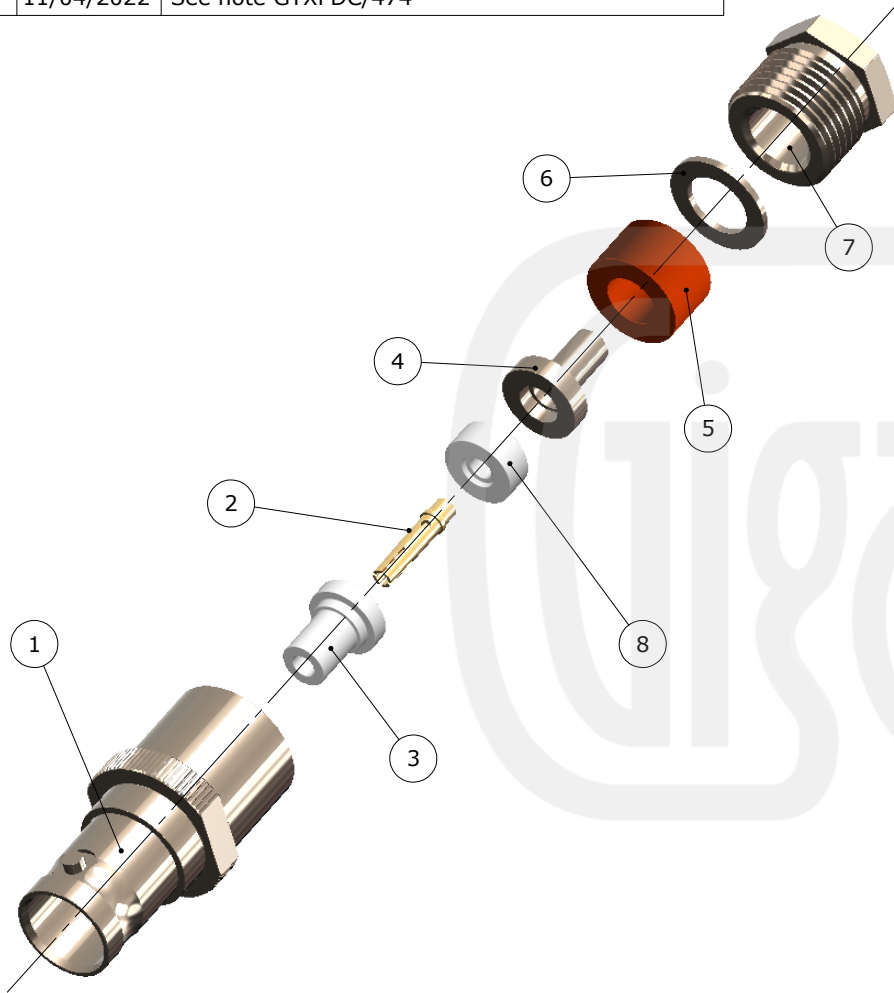

Assembly Instructions:

1) Slide the Backnut, Washer and Gasket onto the cable and strip the cable to the dimensions as shown, taking care not to nick the centre conductor or braid. Fold back the braid and slide the Top Hat onto the cable so that the tube of the Top Hat is between the cable dielectric and the braid (under the cable jacket). Trim off the surplus braid and tin the centre conductor.




2) Slide the Insulator over the cable dielectric to butt up against the Top Hat. Slide the Contact onto the centre conductor so that the flange of the Contact butts up against the Insulator. Solder the Contact and then slide the Gasket and Back Nut up to the Top Hat, trapping the braid. Slide the Front Insulator onto the Contact until it butts up against the Insulator.



3) Insert the cable into the body as far as possible and engage the threads of the Backnut. Then tighten the Backnut.

Strip Dimensions:
A=9.0mm, B=2.0mm, C=5.5mm



8	Insulator	PTFE	White	Unless otherwise specified tolerances 0.5-5 = ± 0.2 >5-30 = ± 0.4 >30-120 = ± 0.6 >120-315 = ± 1.0 >315-1000 = ± 1.6 Angles = $\pm 5^\circ$ Units = mm
7	Back Nut	Brass	Nickel	
6	Washer	Brass	Nickel	
5	Gasket	Rubber	Red	
4	Top Hat	Brass	Nickel	
3	Dielectric	PTFE	White	
2	Contact	Brass	Gold	
1	Body	Brass	Nickel	
	Description	Material	Finish	This document is the confidential property of Gigatronix Limited and may not be copied, reproduced or transmitted to any third party without written authorisation.

Part Number BN10-0223-L06-2

Title: BNC Clamp Jack, Nickel Plated, Compression Fixing, RG58, LBC195, RG223, RG400

Author	PJP
Drawn by	PJP
Drawing date	11/04/2022
Checked by	DB
Checked date	13/04/2022
Scale	Not to scale