Equal to breaking strain of cable

Cable Retention Durability Fixing Method

2. Environmental

RoHS Compliant Temperature Range Yes -55 to +85 degrees C

500 mating cycles

Crimp

3. Electrical

Dielectric Withstanding Impedance Interface Frequency Working Voltage


1500 Volts RMS Maximum 50 ohms 4 GHz 500 Volts RMS Maximum





10.90

							Author	РЈР	
				Unless otherwise specified tolerances		• • •	Drawn by	РЈР	
				$0.5-5 = \pm 0.2 \\ >5-30 = \pm 0.4 \\ 20 \pm 0.6$	[[1	עות∧ זל נאו	Drawing date	31/01/2022	
5	Insulator	Delrin	White	$30-120 = \pm 0.6$ $210-315 = \pm 1.0$ $215 = 1000 = \pm 1.6$			Checked by	DB	
4	Ferrule	Brass	Nickel	>315-1000 = ±1.6 Angles = ±5° Units = mm	U I		Checked date	31/01/2022	
3	Dielectric	Delrin	White	Units = mm			Scale	Not to scale	
2	Contact	Brass	Gold	This document is the confidential	Part Number	BN10-0174-C06D-1			
1	Body	Zinc Alloy	Nickel	property of Gigatronix Limited and may not be copied, reproduced or transmitted to any third party	Title: BNC Crimp Jack, Nickel Plated, Zinc Alloy Body, RG174, LBC100, RG316				
	Description	Material	Finish	without written authorisation.					

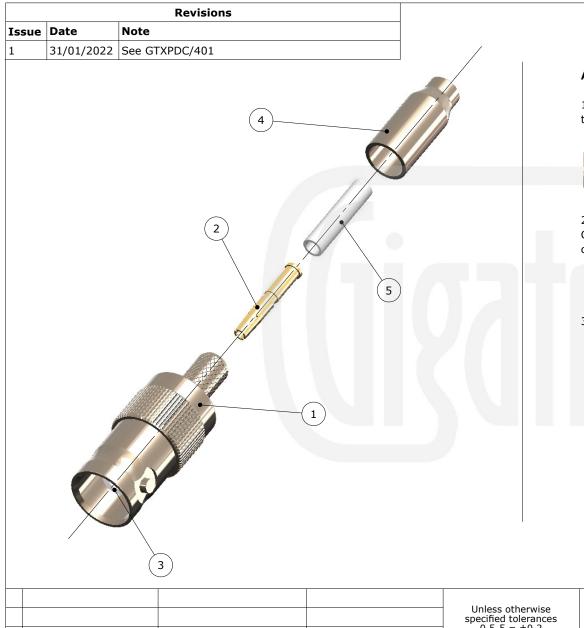

ASSEMBLY INSTRUCTIONS

Assembly Instructions:

1) Slide the ferrule onto the cable and strip the cable to the dimensions as shown, taking care not to nick the centre conductor or braid



2) Open the cable braid and slide the insulator tube over the dielectric but under the braid. Crimp the contact onto the centre core and then slide the contact into the body until it captivates, ensuring that the cable braid is on the outside of the connector mandril.

3) Slide the ferrule forward and crimp



```
Crimp Hex. Sizes:
5.41mm Hex., 1.69mm Hex
```

Strip Dimensions:

A=12.0mm, B=3.0mm, C=3.0mm



							Author	РЈР
				Unless otherwise specified tolerances	(Gigatronix	Drawn by	РЈР	
				$0.5-5 = \pm 0.2$ >5-30 = ± 0.4		Drawing date	31/01/2022	
5	Insulator	Delrin	White	>30-120 = ±0.6 >120-315 = ±1.0		Checked by	DB	
4	Ferrule	Brass	Nickel	>315-1000 = ±1.6 Angles = ±5°			Checked date	31/01/2022
3	Dielectric	Delrin	White	Units = mm			Scale	Not to scale
2	Contact	Brass	Gold	This document is the confidential	Part Number BN10-0174-C06D-1			
1	Body	Zinc Alloy	Nickel	property of Gigatronix Limited and may not be copied, reproduced or transmitted to any third party	Title: BNC Cri	Crimp Jack, Nickel Plated, Zinc Alloy Body, RG174, LBC100, RG316		
	Description	Material	Finish	without written authorisation.				