

Revisions

Issue	Date	Note
1	15/12/2022	See note GTXPDC/626

DATASHEET



1. Mechanical


Cable Retention	Equal to breaking strain of cable
Fixing Method	Crimp / Solder
Durability	500 mating cycles
Contact Termination	Solder

2. Environmental

RoHS Compliant	Yes
Temperature Range	-65 to +165 degrees C

3. Electrical

Dielectric Withstanding	1500 Volts RMS Maximum
Impedance	75 ohms
Interface Frequency	12 GHz
Working Voltage	500 Volts RMS Maximum

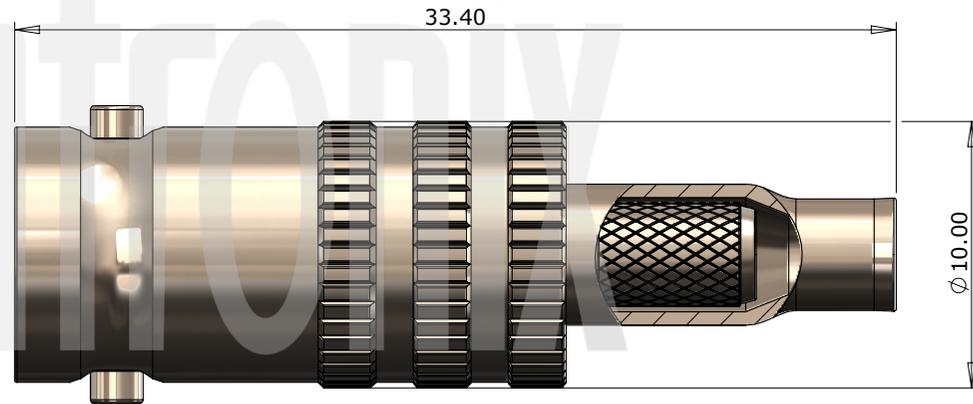

Description	Material	Finish
6 Tube	Brass	Nickel
5 Insulator	PTFE	White
4 Ferrule	Brass	Nickel
3 Dielectric	PTFE	White
2 Contact	Phosphor Bronze	Gold
1 Body	Brass	Nickel

Unless otherwise specified tolerances
 0,5-5 = ±0,2
 >5-30 = ±0,4
 >30-120 = ±0,6
 >120-315 = ±1,0
 >315-1000 = ±1,6
 Angles = ±5°
 Units = mm

This document is the confidential property of Gigatronix Limited and may not be copied, reproduced or transmitted to any third party without written authorisation.



Author	PJP
Drawn by	PJP
Drawing date	15/12/2022
Checked by	DB
Checked date	19/12/2022
Scale	Not to scale

Part Number BN10-0179-C06-Z
Title: BNC 12G SDI Crimp Jack, Belden RG179DT

Revisions		
Issue	Date	Note
1	15/12/2022	See note GTXPDC/626

ASSEMBLY INSTRUCTIONS

Assembly Instructions

1) Slide the ferrule onto the cable and strip the cable to the dimensions as shown, taking care not to nick the centre conductor or braid.



2) Open the cable braid and slide the tube (6) over the dielectric and under the braid. Slide the small insulator (5) over the centre core, solder the contact onto the centre core and slide the contact into the body until it captivates, ensuring that the cable braid is on the outside of the connector mandril.




3) Slide the ferrule forward and crimp.



Crimp Die Sizes:
4.52mm Hex., Solder centre core

Strip Dimensions:
A=8.0mm, B=5.0mm, C=6.5mm

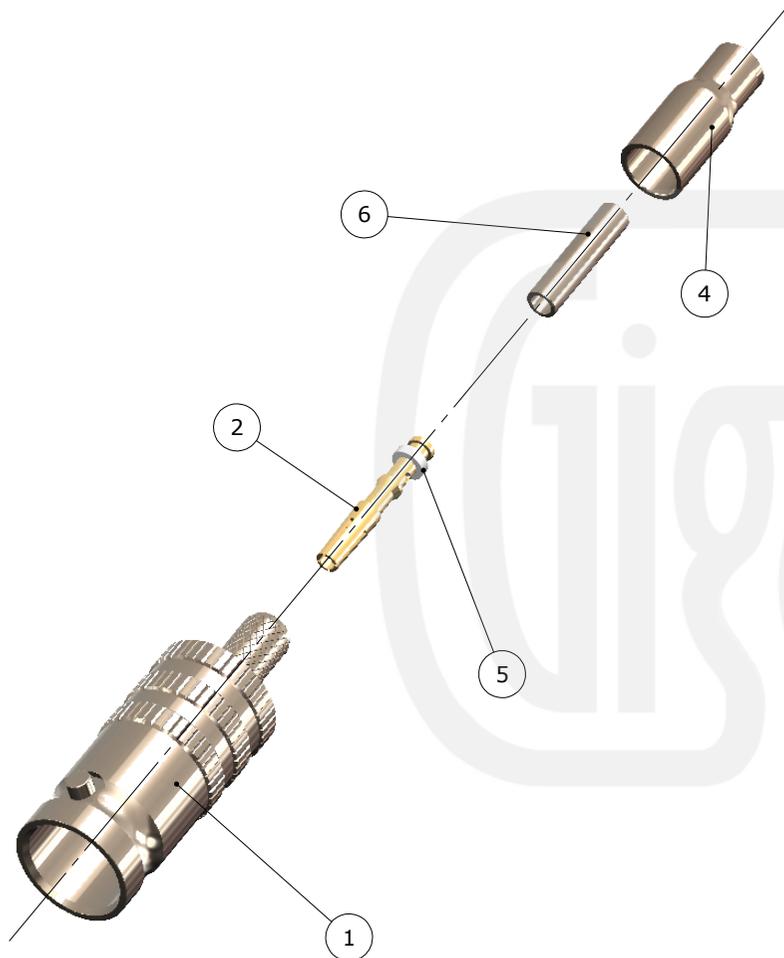

Description	Material	Finish
6 Tube	Brass	Nickel
5 Insulator	PTFE	White
4 Ferrule	Brass	Nickel
3 Dielectric	PTFE	White
2 Contact	Phosphor Bronze	Gold
1 Body	Brass	Nickel

Unless otherwise specified tolerances
 0.5-5 = ±0.2
 >5-30 = ±0.4
 >30-120 = ±0.6
 >120-315 = ±1.0
 >315-1000 = ±1.6
 Angles = ±5°
 Units = mm

This document is the confidential property of Gigatronix Limited and may not be copied, reproduced or transmitted to any third party without written authorisation.



Part Number BN10-0179-C06-Z
Title: BNC 12G SDI Crimp Jack, Belden RG179DT

Author	PJP
Drawn by	PJP
Drawing date	15/12/2022
Checked by	DB
Checked date	19/12/2022
Scale	Not to scale