Revisions			Revisions
Issue D		Date	Note
	1	28/07/2022	See note GTXPDC/552

# **DATASHEET**

## 1. Mechanical

Cable Retention

Durability

Fixing Method

Equal to breaking strain of cable

500 mating cycles

Crimp



#### 2. Environmental

RoHS Compliant

Temperature Range

Yes

-55 to +85 degrees C

#### 3. Electrical

Dielectric Withstanding

Impedance


Interface Frequency

Working Voltage


1500 Volts RMS Maximum 50 ohms

4 GHz

500 Volts RMS Maximum



Panel Cutout

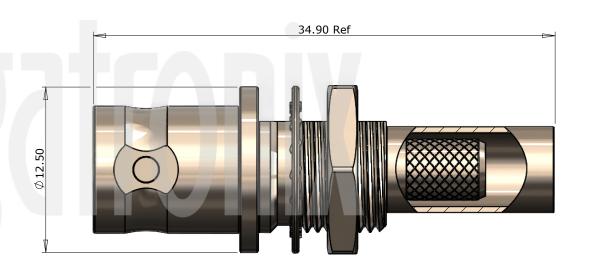

6 Washer SS41 Nickel 5 Lock Nut Brass Nickel 4 Ferrule Brass Nickel 3 Dielectric Delrin White 2 Contact Brass Gold 1 Body Brass Nickel		Description	Material	Finish	
5 Lock Nut Brass Nickel 4 Ferrule Brass Nickel 3 Dielectric Delrin White	1	Body	Brass	Nickel	
5 Lock Nut Brass Nickel 4 Ferrule Brass Nickel	2	Contact	Brass	Gold	
5 Lock Nut Brass Nickel	3	Dielectric	Delrin	White	
7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	4	Ferrule	Brass	Nickel	
6 Washer SS41 Nickel	5	Lock Nut	Brass	Nickel	
	6	Washer	SS41	Nickel	

Unless otherwise specified tolerances  $0.5\text{-}5 = \pm 0.2$   $\Rightarrow 5\text{-}30 = \pm 0.4$   $\Rightarrow 30\text{-}120\text{-}315 = \pm 1.0$   $\Rightarrow 315\text{-}1000 = \pm 1.6$  Angles =  $\pm 5^\circ$  Units = mm

This document is the confidential property of Gigatronix Limited and may not be copied, reproduced or transmitted to any third party without written authorisation.

Haira	troniv
ไไม่ให้ไ	

Author	РЈР
Drawn by	РЈР
Drawing date	28/07/2022
Checked by	DB
Checked date	02/08/2022
Scale	Not to scale

Part Number | BN62-0058-C06

Title: BNC Crimp Panel Jack, Front Entry, Nickel Plated, RG58, LBC195, URM43

Revisions			
Issue Date		Note	
1	28/07/2022	See note GTXPDC/552	

## **ASSEMBLY INSTRUCTIONS**

## **Assembly Instructions**


1) Slide the ferrule onto the cable and strip the cable to the dimensions as shown, taking care not to nick the centre conductor or braid.







2) Crimp the contact onto the centre core and slide the contact into the body until fully located, ensuring that the cable braid is on the outside of the connector mandril.





**Crimp Die Sizes:** 

5.41mm Hex., 1.69mm Hex.

**Strip Dimensions:** 

A=8.0mm, B=3.0mm, C=3.0mm



	Description	Material	Finish
1	Body	Brass	Nickel
2	Contact	Brass	Gold
3	Dielectric	Delrin	White
4	Ferrule	Brass	Nickel
5	Lock Nut	Brass	Nickel
6	Washer	SS41	Nickel

Unless otherwise specified tolerances  $0.5\text{-}5 = \pm 0.2$   $> 5\text{-}30 = \pm 0.4$   $> 30\text{-}120 = \pm 0.6$   $> 120\text{-}315 = \pm 1.0$   $> 315\text{-}1000 = \pm 1.6$  Angles  $= \pm 5^{\circ}$  Units = mm

This document is the confidential property of Gigatronix Limited and may not be copied, reproduced or transmitted to any third party without written authorisation.



Author		РЈР
Drawn b	y	РЈР
Drawing	date	28/07/2022
Checked	by	DB
Checked	date	02/08/2022
Scale		Not to scale

Part Number BN62-0058-C06

**Title**: BNC Crimp Panel Jack, Front Entry, Nickel Plated, RG58, LBC195, URM43