

**Revisions**

Issue	Date	Note
2	22/10/2021	See note GTXPDC/334 - Checked DB 19/11/2021



**1. Mechanical**



Cable Retention Equal to breaking strain of cable  
 Durability 500 mating cycles

**2. Environmental**

RoHS Compliant Yes  
 Temperature Range -65 to +165 degrees C

**3. Electrical**

Dielectric Withstanding 1500 Volts RMS Maximum  
 Impedance 50 ohms  
 Interface Frequency 4 GHz  
 Working Voltage 500 Volts RMS Maximum

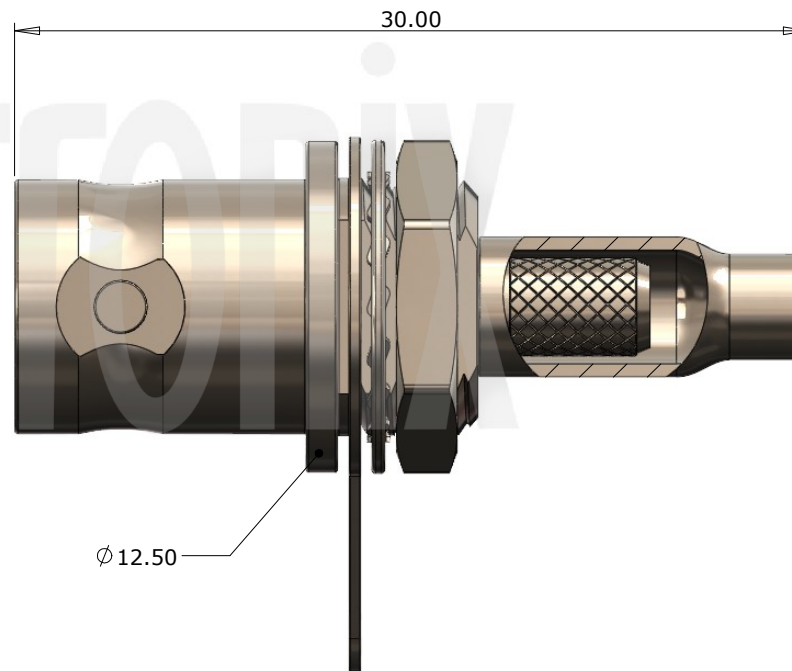

7	Washer	SS41	Nickel
6	Lock Nut	Brass	Nickel
5	Solder Tag	SS41	Nickel
4	Ferrule	Brass	Nickel
3	Dielectric	PTFE	White
2	Contact	Brass	Gold
1	Body	Brass	Nickel
	<b>Description</b>	<b>Material</b>	<b>Finish</b>

Unless otherwise specified tolerances  
 0.5-5 = ±0.2  
 >5-30 = ±0.4  
 >30-120 = ±0.6  
 >120-315 = ±1.0  
 >315-1000 = ±1.6  
 Angles = ±5°  
 Units = mm

This document is the confidential property of Gigatronix Limited and may not be copied, reproduced or transmitted to any third party without written authorisation.



<b>Author</b>	PJP
<b>Drawn by</b>	PJP
<b>Drawing date</b>	24/08/2020
<b>Checked by</b>	SM
<b>Checked date</b>	17/03/2021
<b>Scale</b>	Not to scale

**Part Number** BN62-0174-C06

**Title:** BNC Crimp Panel Jack, Front Entry, Nickel Plated, PTFE Dielectric, RG174, RG316, LBC100

Revisions		
Issue	Date	Note
2	22/10/2021	See note GTXPDC/334 - Checked DB 19/11/2021

# ASSEMBLY INSTRUCTIONS


## Assembly Instructions

1) Slide the ferrule onto the cable and strip the cable to the dimensions as shown, taking care not to nick the centre conductor or braid.



2) Crimp the contact onto the centre core and slide the contact into the body until fully located, ensuring that the cable braid is on the outside of the connector mandril.

3) Slide the ferrule forward and crimp.



**Crimp Hex. Sizes:**  
4.52mm Hex, 1.69mm Hex.

**Strip Dimensions:**  
A=8.0mm, B=3.0mm, C=3.0mm



Description	Material	Finish
7 Washer	SS41	Nickel
6 Lock Nut	Brass	Nickel
5 Solder Tag	SS41	Nickel
4 Ferrule	Brass	Nickel
3 Dielectric	PTFE	White
2 Contact	Brass	Gold
1 Body	Brass	Nickel

Unless otherwise specified tolerances  
0.5-5 = ±0.2  
>5-30 = ±0.4  
>30-120 = ±0.6  
>120-315 = ±1.0  
>315-1000 = ±1.6  
Angles = ±5°  
Units = mm

This document is the confidential property of Gigatronix Limited and may not be copied, reproduced or transmitted to any third party without written authorisation.



**Part Number** BN62-0174-C06

**Title:** BNC Crimp Panel Jack, Front Entry, Nickel Plated, PTFE Dielectric, RG174, RG316, LBC100

<b>Author</b>	PJP
<b>Drawn by</b>	PJP
<b>Drawing date</b>	24/08/2020
<b>Checked by</b>	SM
<b>Checked date</b>	17/03/2021
<b>Scale</b>	Not to scale