
SUMMARY VIEW

Revisions				
Issue	Date	Note		
4	30/06/2021	See note GTXPDC/296 - DB		

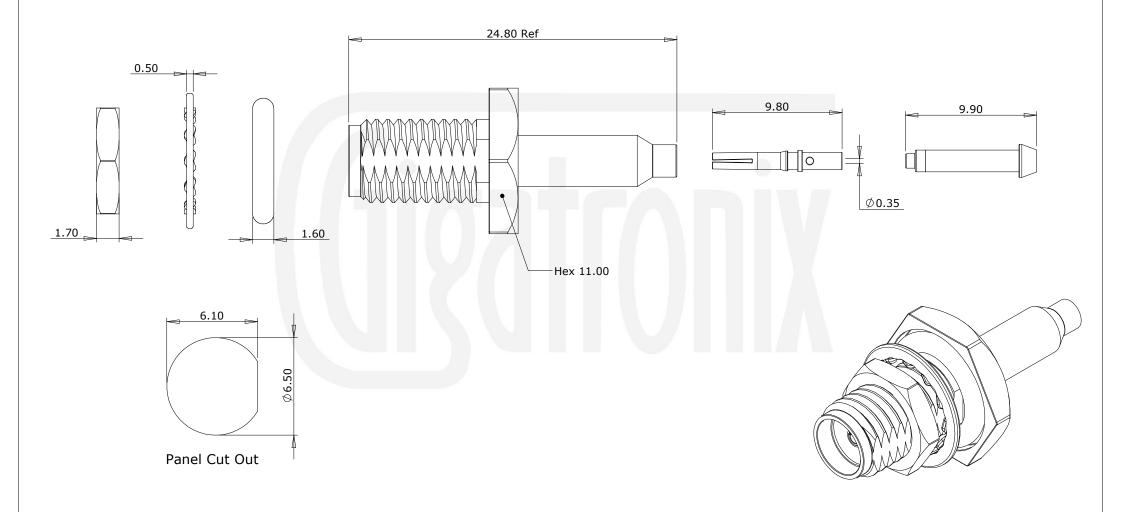

2	Dielectric Contact Body	PTFE Beryllium Copper Brass	White Gold Gold
_			
	Dielectric	PTFE	White
3			
4	Lock Nut	Brass	Gold
5	Washer	Phosphor Bronze	Gold
6	O Ring	Silicone Rubber	Black
7	Ferrule	Brass	Gold
8	Reducer	Brass / PTFE	Gold / White

Unless otherwise specified tolerances $0.5\text{-}5 = \pm 0.2$ $\Rightarrow 5\text{-}30 = \pm 0.4$ $\Rightarrow 30\text{-}120\text{-}315 = \pm 1.0$ $\Rightarrow 315\text{-}1000 = \pm 1.6$ Angles = $\pm 5^\circ$ Units = mm

This document is the confidential property of Gigatronix Limited and may not be copied, reproduced or transmitted to any third party without written authorisation.



Author	РЈР
Drawn by	РЈР
Drawing date	10/01/2019
Checked by	DB
Checked date	15/01/2019
Scale	3.5 : 1

Part Number | MA02-0178-C01

Title: SMA Crimp Bulkhead Jack, Gold Plated, 11mm Hex Flange, RG178