


RG402CFEP

Conformable FEP Coaxial Cable

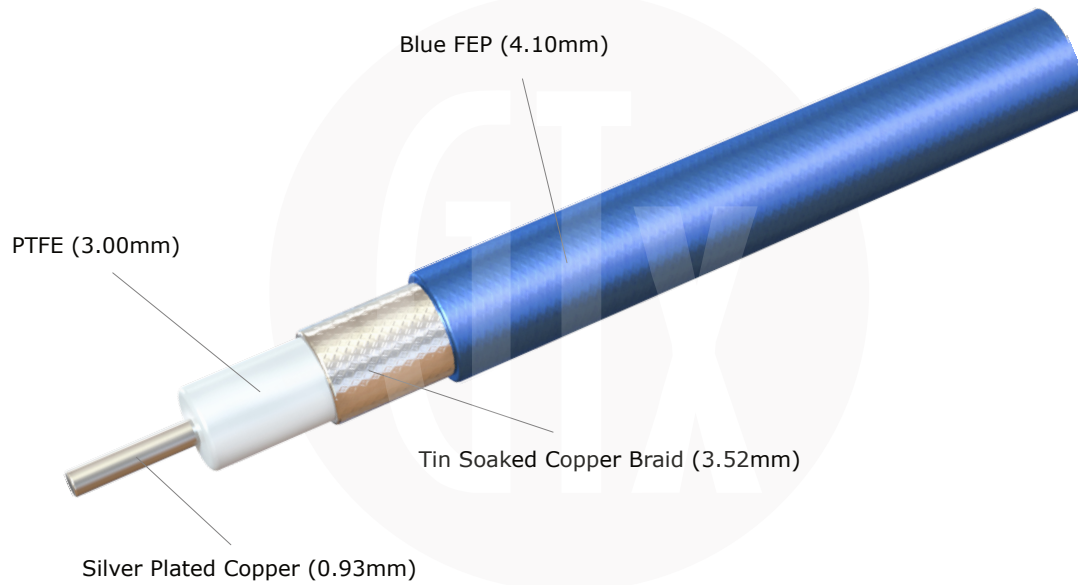

MATERIAL SPECIFICATION

Inner Conductor	Silver Plated Copper (0.93mm)
Dielectric	PTFE (3.00mm)
Outer Conductor	Tin Soaked Copper Braid (3.52mm)
Jacket	Blue FEP (4.10mm)

ELECTRICAL SPECIFICATION

Impedance	50 Ohms
Max. Frequency	DC to 34 GHz
Capacitance	95.1 pF/m
Velocity Of Propagation	70%

MECHANICAL & ENVIRONMENTAL SPECIFICATION

Bending Radius (static)	10.25mm
Weight	40 gms/m
RoHS Compliant	Yes
Temperature Range	-55 to +125 degrees C

RG402CFEP

Conformable FEP Coaxial Cable

FREQUENCY	ATTENUATION (per 100m)
0.5 GHz	26.0 dB
1 GHz	39.0 dB
5 GHz	92.0 dB
10 GHz	138.0 dB
20 GHz	210.0 dB

